




02.

Derrock FLC 2000/48-30 Wave Screen Shaker Screen Replacement ▼

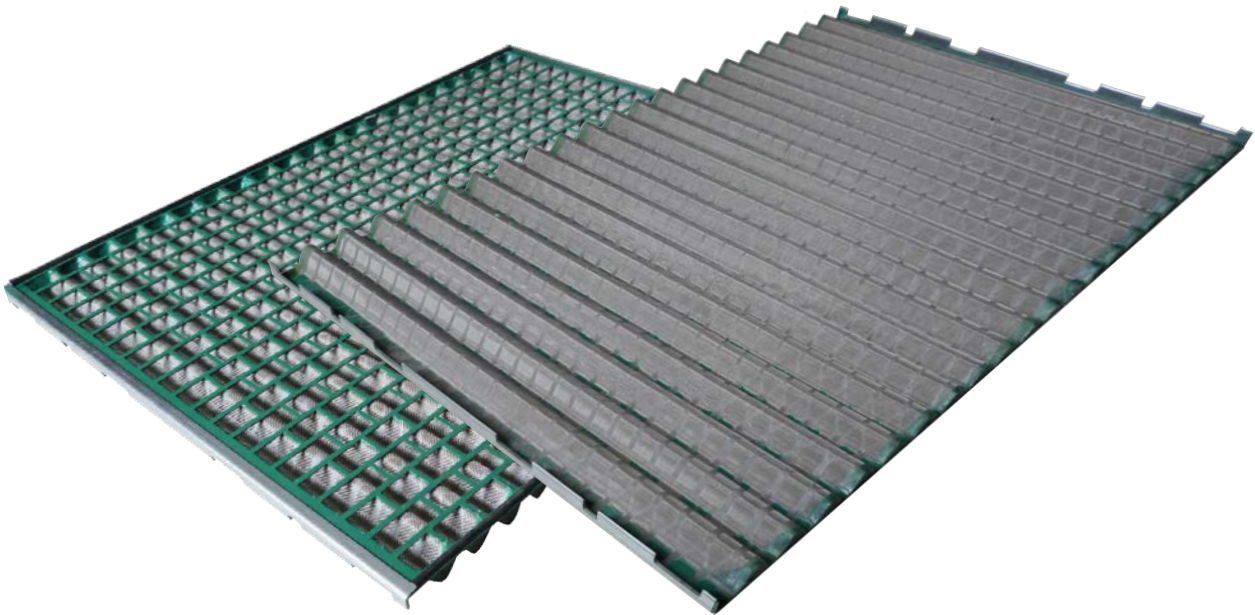


Compatible shale shakers

- Derrock FLC (Flo-Line Cleaner) 2000 3-panel shaker.
- Derrock FLC (Flo-Line Cleaner) 2000 4-panel shaker.
- Derrock FLC (Flo-Line Cleaner) 2000 series mud cleaners
- Derrock FLC Plus, FLC with AWD, HI-G dryer.




Technical Parameter


- **Model No.:** SJ-Wave 2000.
- **Material:** stainless steel 304/316/316 L.
- **Construction Type:** Wave Type.
- **Perforated Mesh Shape:** rectangle.
- **Standard:** API RP 13C.
- **API RP 13C Designation:** API 120 - API 325.
- **Series:** DX, DF, HP optional.
- **Warranty Period:** 1 year.

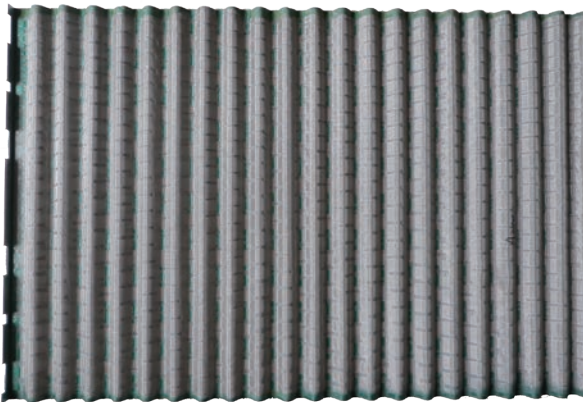


Positive Side

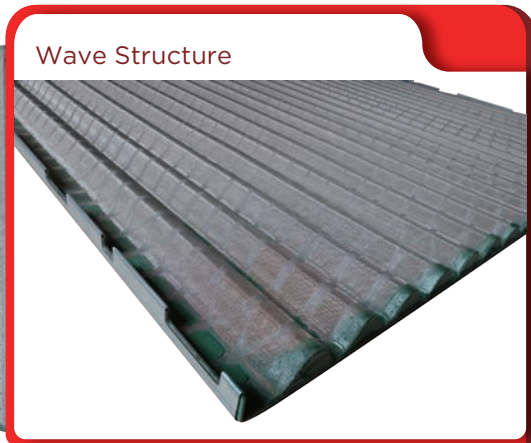

Wave Structure

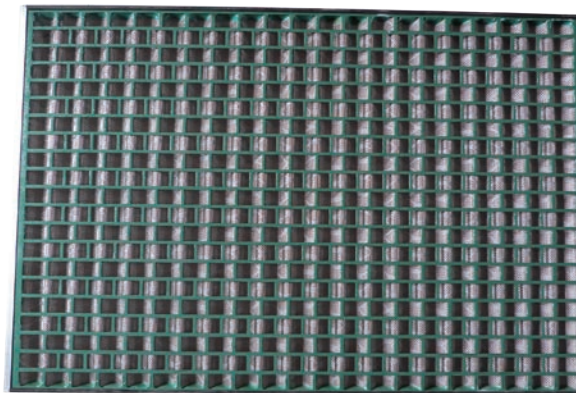


Reverse Side

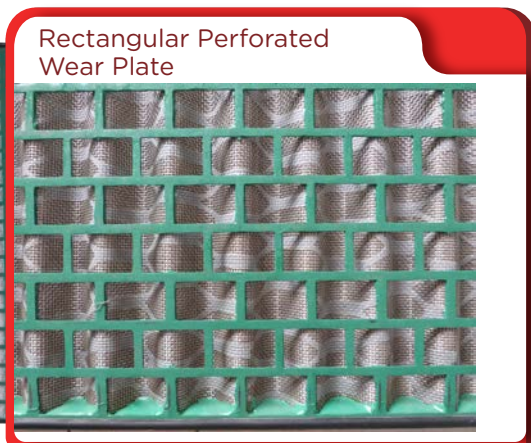

Rectangular Perforated
Wear Plate



SJ-Wave 2000-A325

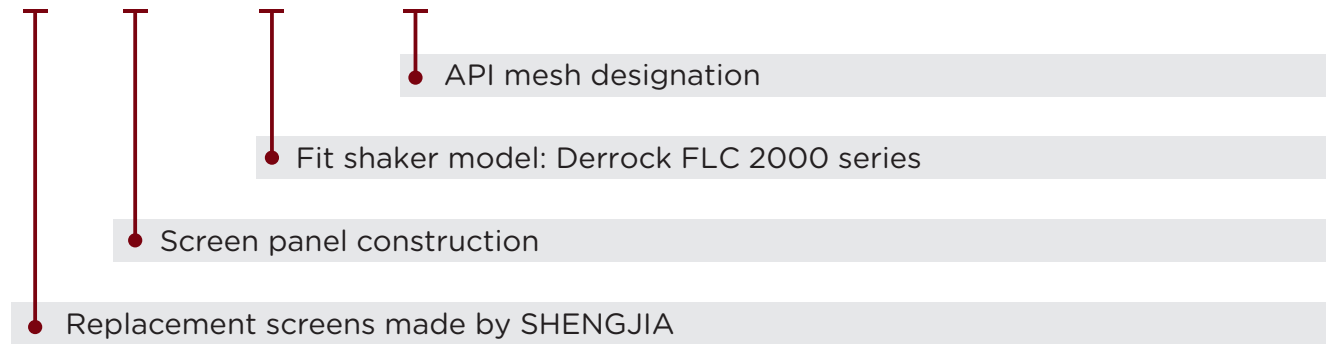

Performance Parameter

Screen Designation	Mesh Type	API RP 13C Designation	Conductance Number	D100 Separation (microns)	Layer No.	Non-Blank Area (sq.ft)
SJ-Wave 2000-A325	DF	API 325	0.39	44	2/3	8.3
SJ-Wave 2000-A270	DF	API 270	0.67	57	2/3	8.3
SJ-Wave 2000-A230	DF	API 230	0.71	68	2/3	8.3
SJ-Wave 2000-A200	DX	API 200	1.32	73	2/3	8.3
SJ-Wave 2000-A170	DX	API 170	1.34	83	2/3	8.3
SJ-Wave 2000-A140	DX	API 140	1.89	101	2/3	8.3
SJ-Wave 2000-A120	DX	API 120	1.89	134	2/3	8.3
SJ-Wave 2000-A100	DX	API 100	2.66	164	2/3	8.3
SJ-Wave 2000-A80	DX	API 80	2.76	193	2/3	8.3
SJ-Wave 2000-A70	DX	API 70	3.33	203	2/3	8.3
SJ-Wave 2000-A60	DX	API 60	4.1	268	2/3	8.3
SJ-Wave 2000-A50	DX	API 50	5.17	285	2/3	8.3
SJ-Wave 2000-A40	DX	API 40	8.64	439	2/3	8.3
SJ-Wave 2000-A35	DX	API 35	9.69	538	2/3	8.3
SJ-Wave 2000-A20	DF	API 20	10.88	809	2/3	8.3

* **D100:** Particles this size and larger will normally be discarded.

* **API:** Corresponding API sieve equivalent as per API RP 13C.

* **Conductance No.:** This represents the ease with which a liquid can flow through the screen. Larger values represent higher volume handling.